



PROFESSIONAL
THINKING

PRODUCT SHEET EKC 96

TECNOEKA SRL - VIA MARCO POLO, 11 - 35010 BORGORICCO - PADOVA - ITALY - TEL. +39 049 5791479 +39 049 9300344 - FAX +39 049 5794387 - E-MAIL: INFO@TECNOEKA.COM - WWW.TECNOEKA.COM - WWW.TECNOEKA.RU


EKC 96 - COOKER WITH 5 BURNERS AND ELECTRIC CONVECTION OVEN

EKA EVOLUTION LINE

COOKERS



The EKC 96 semi-professional cooker has been added to the Eka product range as a complementary appliance designed for snack food kiosks and bars looking for a sound compromise between reliability and quality, which is achieved in part thanks to the burners featuring safety thermocouples and electronic ignition.

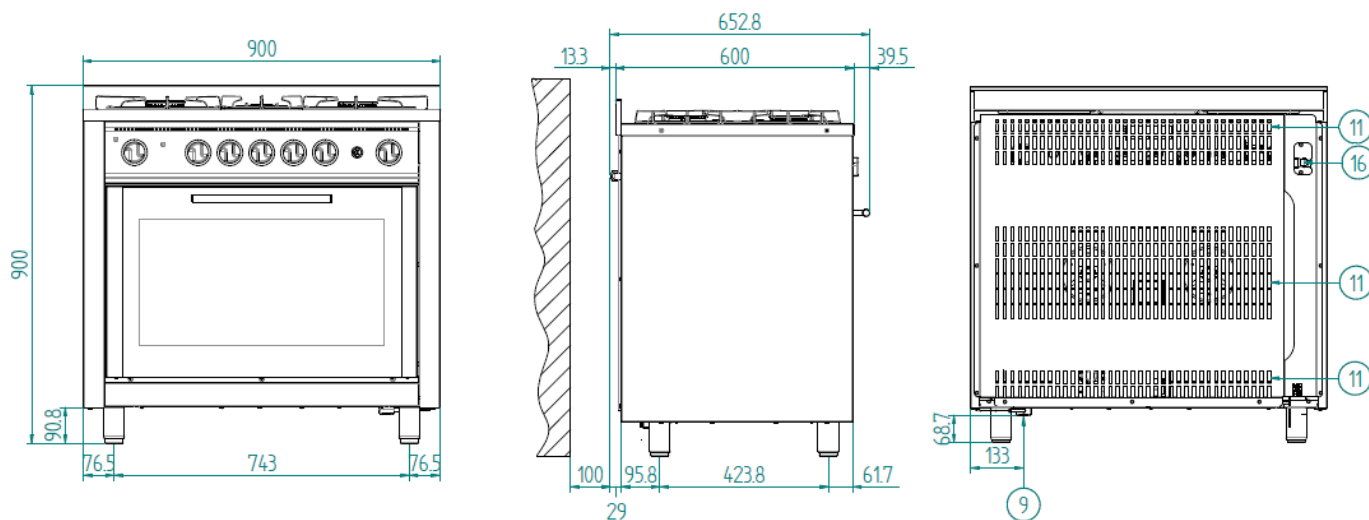

LEGEND

1	USB PORT	11	DON'T CLOG UP VENTILATION OPENINGS
2	SERIAL PORT	12	WATER INLET MAX. 200 kPa
3	PLUG FOR CORE PROBE	13	SOFTENED WATER INLET MAX 200 kPa
4	WATER OUTLET TUBE	14	BOILER CLEANING INLET
5	WASHING WATER INLET	15	DON'T OPEN CAP WHILE WORKING
6	SOFTENED WATER INLET	16	GAS INLET THREADED JOINT 3/4"
7	WATER INLET	17	POWER SUPPLY TO TOP OVEN
8	STEAM OUTLET	18	PRE-CARVED HOLE FOR BOTTOM OVEN POWER SUPPLY
9	ELECTRIC CABLE FIXER	19	STEAM SUCTION PIPE
10	CAUTION! HOT SURFACE		





PROFESSIONAL
THINKING

PRODUCT SHEET EKC 96

TECNOEKA SRL - VIA MARCO POLO, 11 - 35010 BORGORICCO - PADOVA - ITALY - TEL. +39 049 5791479 +39 049 9300344 - FAX +39 049 5794387 - E-MAIL: INFO@TECNOEKA.COM - WWW.TECNOEKA.COM - WWW.TECNOEKA.RU

DIMENSIONAL FEATURES				HOB FUNCTIONAL FEATURES				
DIMENSIONS	W	D	H	AISI 304				
COOKER DIMENSIONS (mm)	900	655	900	BURNERS THERMAL SUPPLY (kW)		14,3		
CARDBOARD BOX DIMENSIONS WITH PALLET (mm)	960	690	1070	N°OF BURNERS		5		
COOKER DIMENSIONS (inches)	35,43	25,78	35,43	TYPE OF BURNERS		CENTRAL TRIPLE-CROWN	1 pcs	3,5 kW
CARDBOARD BOX DIMENSIONS WITH PALLET (inches)	37,79	27,16	42,12			FAST	3 pcs	3 kW
COOKER WEIGHT (kg)	74					SEMI-FAST	1 pcs	1,8 kW
PACKED COOKER WEIGHT (kg)	88			BURNERS IGNITION SYSTEM		ELECTRONIC		
COOKER WEIGHT (lbs)	163,14			BURNERS SAFETY SYSTEM		WITH THERMOCOUPLE		
PACKED COOKER WEIGHT (lbs)	194,00			OVEN FUNCTIONAL FEATURES				
FAN DIMENSIONS (mm)	Ø 150 - NR. 6 BLADES			POWER		ELECTRICITY		
CENTER-TO-CENTER DISTANCE BETWEEN RUBBER FEET (mm)	468			CAPACITY		N° 4 TRAYS/GRIDS 1/1 GN		
DISTANCE BETWEEN RACK RAILS (mm)	70			TYPE OF COOKING		VENTILATED		
ELECTRICAL FEATURES				HUMIDIFICATION		/		
OVEN POWER SUPPLY (kW)	2,9			COOKING CHAMBER		AISI 430 STAINLESS STEEL		
FREQUENCY (Hz)	50/60			WATER OUTLET		/		
VOLTAGE (Volt)	AC 220/230			STEAM OUTLET		/		
N° OF MOTORS	2 MONODIRECTIONAL			TEMPERATURE		100 ÷ 275°C		
RPM	2250			TEMPERATURE CONTROL		THERMOSTAT		
N° OF RESTISTORS	CIRC.	2 pcs	1,35 kW	CONTROL PANEL		ELECTROMECHANICAL		
	GRILL	1 pcs	2,5 kW	N° OF PROGRAMS		/		
	SOLE	/	/	PROGRAMMABLE COOKING STEPS		/		
BOILER	/			PRE-HEATING TEMPERATURE		/		
LIMIT CONTROL	BIPOLAR WITH MANUAL RESET			PRE-HEATING FUNCTION		/		
PROTECTION AGAINST WATER	/			DOOR	TILT DOOR			
LIGHTING	NR. 2 INCANDESCENT LAMPS (IN THE COOKING CHAMBER)				VENTILATED			
PLUS					INSPECTIONABLE GLASS			
EMBEDDED GASKET				FEET		ADJUSTABLE		
NEW DOOR HINGES				EQUIPMENT				
AISI 304 COOKING CHAMBER				LATERAL SUPPORTS		1 RIGHT + 1 LEFT		
OVEN DOOR WITH INSPECTIONABLE GLASS				CABLE		SINGLE-PHASE [3G 1,5] - L=1450 mm		
				HOB REDUCER CROSS SHAPE				
				OPTIONAL				
				CHROMED GRID 1/1 GN		COD. KG9G		
				AISI 304 CHICKEN PAN		COD. KGP		
				AISI 304 TRAY 1/1 GN (530x325x40 mm)		COD. KT9G		

